

## HYDRAULIC CUTTER

**HT-85** HYDRAULIC CUTTER HEAD  
DESIGN FOR CUTTING COPPER AND ALUMINIUM AND TELEPHONE CABLE.



**S-40H** HYDRAULIC CUTTER HEAD  
DESIGN FOR CUTTING COPPER, ALUMINIUM, CABLE, **WIRE ROPE**

**S-40AH** HYDRAULIC CUTTER HEAD  
DESIGN FOR CUTTING **ACSR**, ALUMINIUM STEEL CABLE, STEEL ROPES AND RODS.



**S-120H, S-100H**  
HYDRAULIC CUTTER HEADS  
DESIGN FOR CUTTING COPPER AND ALUMINIUM, ARMOURED CABLE.



**HT-52, HT-95** HYDRAULIC CUTTER HEAD  
DESIGN FOR CUTTING COPPER AND ALUMINIUM AND TELEPHONE CABLE.



**CPC-85A** HAND HYDRAULIC CUTTER  
TWIN STAGE HYDRAULIC CUTTER DESIGN FOR CUTTING COPPER AND ALUMINIUM CABLES AND TELEPHONE CABLE.



**S-20** HAND HYDRAULIC CUTTER  
DESIGN FOR CUTTING COPPER, ALUMINIUM, CABLE, **WIRE ROPE**



**S-40** HAND HYDRAULIC CUTTER  
DOUBLE STAGE HYDRAULIC CUTTER DESIGN FOR CUTTING COPPER, ALUMINIUM CABLE, **WIRE ROPE**

**S-40A** HAND HYDRAULIC CUTTER  
DOUBLE STAGE HYDRAULIC CUTTER DESIGN FOR CUTTING **ACSR**, ALUMINIUM STEEL CABLE, STEEL ROPES AND RODS.



**S-505** HAND HYDRAULIC CUTTER  
DOUBLE STAGE HYDRAULIC CUTTER FOR CUTTING COPPER, ALUMINIUM CABLE



(Unit: millimeters in diameter)

MODEL	OUTPUT (TONS)	WEIGHT (KGS)	LENGTH (MM)	WIRE ROPE			ROUND BAR				WIRE STRAND			CABLE					
				6 x 7 HEMP-CORE	6 x 12 HEMP-CORE	6 x 19 HEMP-CORE	SOFT COPPER BAR	SOFT ALUMINIUM BAR	SOFT STEEL BAR	REINFORCING BAR	BARE COPPER BAR	BAR ALUMINIUM STRANDS	ACSR	1 x 7 GUY STEEL STRANDS	1 x 19 GUY STEEL STRANDS	TELEPHONE CABLE CCP	LEAD SHEATHED CABLE (TELEPHONE CABLE)	UNDER GROUND CABLE	
CPC-85A	3	7.0	695	---	---	---	---	---	---	---	---	28	46	---	---	---	85	85	50
HT-85	3	6	456	---	---	---	---	---	---	---	---	28	46	---	---	---	85	85	50
S-40H	6	2.8	247	20	25	25	25	22	16	13	32	32	---	20	25	40	40	40	
S-40AH	6	2.8	247	---	---	---	25	22	16	13	32	32	28	---	---	---	---	---	
S-20	6	2.8	390	20	20	20	20	20	16	13	20	20	---	15	16	20	20	20	
S-40	6	6	560	22	25	25	25	22	16	13	32	32	---	20	25	40	40	40	
HT-52	12	6	320	---	---	---	---	---	---	---	---	52	52	---	---	---	52	52	52
S-120H	15	15	600	---	---	---	---	---	---	---	---	---	---	---	---	125	125	75	
S-100H	15	14	570	---	---	---	---	---	---	---	---	---	---	---	---	100	100	75	
HT-95	17	7	350	---	---	---	---	---	---	---	---	95	95	---	---	---	95	95	95
S-40A	6	6	560	---	---	---	25	22	16	13	32	32	28	---	---	---	---	---	
S-505	3	6	520	---	---	---	---	---	---	---	---	28	46	---	---	---	50	50	50

## HYDRAULIC CUTTER

**S-32H** HYDRAULIC CUTTER HEAD  
DESIGN FOR CUTTING COPPER, ALUMINIUM CABLE



**S-32** HAND HYDRAULIC CUTTER  
DESIGN FOR CUTTING COPPER, ALUMINIUM CABLE




**HT-120 HT-100** HYDRAULIC CUTTER HEAD  
DESIGN FOR CUTTING COPPER AND ALUMINIUM AND TELEPHONE CABLE



**WR-25** HAND HYDRAULIC CUTTER  
DESIGN FOR CUTTING COPPER, ALUMINIUM CABLE ACSR ALUMINIUM STEEL CABLE, STEEL ROPES AND RODS



**S-60H** HYDRAULIC CUTTER HEAD  
DESIGN FOR CUTTING COPPER,ALUMINIUM, ACSR,ALUMINIUM STEEL CABLES,STELL ROPES AND RODS , ARMOURED CABLE  
630 mm<sup>2</sup> Ø 60 mm

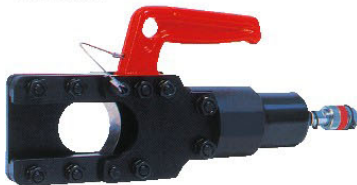

**CPC-85FR** HAND HYDRAULIC CUTTER  
DOUBLE STAGE HYDRAULIC CUTTERS DESIGN FOR CUTTING COPPER AND ALUMINIUM CABLES AND TELEPHONE CABLE.  
• FIBERGLASS HANDLES



**WR-16**  
HAND HYDRAULIC CUTTER  
DESIGN FOR CUTTING ROUND BAR.



**S-40FR** HAND HYDRAULIC CUTTER  
DOUBLE STAGE HYDRAULIC CUTTERS DESIGN FOR CUTTING COPPER, ALUMINIUM, CABLE,WIRE ROPE

**S-40AFR** HAND HYDRAULIC CUTTER  
FOR CUTTING ACSR, SOFT STEEL BAR

**S-45FR** HAND HYDRAULIC CUTTER  
FOR CUTTING COPPER, ALUMINIUM CABLE, WIRE ROPE



MODEL	OUTPUT (TONS)	WEIGHT (KGS)	LENGTH (MM)	WIRE ROPE			ROUND BAR				WIRE STRAND				CABLE			
				6 x 7 HEMP-CORE	6 x 12 HEMP-CORE	6 x 19 HEMP-CORE	SOFT COPPER BAR	SOFT ALUMINIUM BAR	SOFT STEEL BAR	REIN-FORCING BAR	BARE COPPER BAR	BAR ALUMINIUM STRANDS	ACSR	1 x 7 GUY STEEL STRANDS	1 x 19 GUY STEEL STRANDS	TELE-PHONE CABLE CCP	LEAD SHEATHED CABLE (TELE-PHONE CABLE)	UNDER GROUND CABLE
S-32	6.5	3.8	460	---	---	---	---	---	---	---	32	28	---	---	---	30	30	30
S-32H	6.7	2.9	295	---	---	---	---	---	---	---	32	28	---	---	---	30	30	30
HT-120	8	14.5	600	---	---	---	---	---	---	---	42	46	---	---	---	125	125	75
WR-25	7.5	4	426	18	25	25	25	25	20	---	25	25	25	20	20	25	25	25
S-40FR	6	6	560	20	25	25	25	22	16	---	40	40	---	20	25	40	40	40
CPC-85FR	3	7.0	695	---	---	---	---	---	---	---	28	46	---	---	---	85	85	50
S-60H	12	11	420	25	30	30	35	28	22	---	50	50	35	30	30	---	---	50
WR-16	6	4.7	560	---	---	---	16	16	16	14	---	---	---	---	---	---	---	---
HT-100	8	13.5	570	---	---	---	---	---	---	---	42	46	---	---	---	100	100	75
S-40AFR	6	6	560	---	---	---	25	22	16	13	32	32	28	---	---	---	---	---
S-45FR	6	6	560	20	25	25	25	22	16	---	45	45	---	20	25	45	45	45